

SORB**MAX**[™]*PLUS*FILTER OUT THE DISTASTE.

It starts with the SorbMAX PLUS filtration system.

Reduce Chloramines for more enjoyable water.

Many municipalities use chloramines or chlorine as a disinfectant in the water supply, which can leave the taste or smell of chlorine behind. SorbMAX *PLUS* can reduce these contaminants for more drinkable water. And as you reduce excess chloramines and chlorine, you'll also reduce dry skin and hair that results from too much chlorine in your water.

Taste and smell left behind.

SorbMAX is a whole-house filtration system that provides tasteless and odorless water from every tap in the house. The carbon filter reduces chloramines, chlorinated byproducts, dissolved organic contaminants (including synthetic organic chemicals), metallic tastes and other contaminants that can interfere with water quality to ensure clean, fresh tasting water flowing through your home.

User-friendly.

Virtually maintenance-free, the SorbMAX *PLUS* features an electronic control valve and automated programming for a "set it and forget it" solution.

Efficient carbon filter.

The automatic backwash feature removes accumulated contaminants and self-activates to backwash the filtration media, which means the carbon operates at its most efficient resulting in a longer carbon filter life span.

SYSTEM FEATURES

Built to Last

Manufactured with durable, commercial-grade, corrosion-resistant components, the SorbMAX *PLUS* includes a strong product warranty (5 years on valve/10 years on tank).

Certified Media & Components

The media is third-party certified to NSF/ANSI Standard 61 ensuring the product complies with strict manufacturing standards. The components are also certified to NSF/ANSI Standards 44 and/or 61.

Triton Backwash Control Valve.

The valve is a fully automated electronic control backwashing valve with a solid-state microprocessor designed and programmed to be very efficient in water usage. The control valve has low voltage (12 VAC) operation for safety and low energy requirements of only 12-VAC means typical annual electricity costs of less than \$2 per year to operate. The valve has multiple choices for plumbing connections of $\frac{3}{4}$ ", 1" and $\frac{1}{4}$ ".


System Specifications

Model*	Recommended Max Flow Rate (gpm)	Backwash Rate	Tank Size
SBMP10	2.7	5.5	10 X 54
SBMP12	3.9	7.9	12 X 52
SBMP13	4.6	9.2	13 X 54

^{*} A water analysis is highly recommended for proper system sizing and application

HOW IT WORKS

- Untreated water flows through the TechSorb™ C3 catalytic carbon bed.
- As water passes through the TechSorb C3 catalytic carbon bed, it attracts and captures chloramines, chorine and other contaminants within its pore structure as well as removing or reducing a wide range of taste and odor causing contaminants and other unhealthy chemicals.
- 3 Clean tasting water enters your home providing healthier, cleaner water to you and your family.
- SorbMAX PLUS periodically backwashes the TechSorb C3 catalytic carbon to keep the bed clean and expose more of the carbon pores, allowing for efficient carbon operation and a longer lifespan.

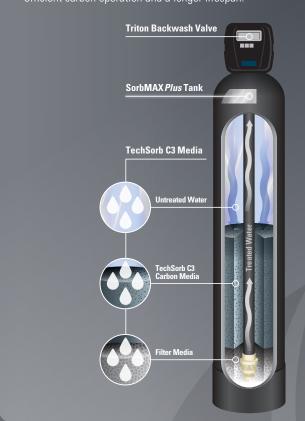

Operating Parameters

pH	5.5 – 9.5	
Temperature	Min. 40°F – Max. 110°F	
Other considerations	Water should be free from oil and suspended matter Water Should be free from iron and turbidity	

^{*} TechSorb C3 media will need to be replaced periodically as it exhausts

AUTHORIZED WATERTECH DEALER





